




*fleece'n'flex PLUS (brushed)*



*fleece'n'flex PLUS (shingle)*

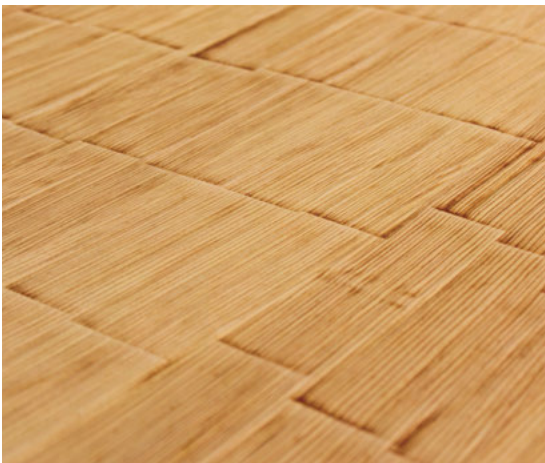

*fleece'n'flex PLUS (bark)*

## fleece'n'flex PLUS with textured surface

We offer fleece-backed veneer with structured surface in several different texture types and more than 140 species of wood, including PEFC and FSC certified veneers, precious burl veneers and other rarities.

The textured veneer is made of two layers of veneer. The face side is precious veneer of your choice and the back is beech veneer with a smooth surface. Fleece between the layers adds strength and suppleness.

The texture, which you can see and feel, is pressed into the fine veneer surface under high pressure and temperature. Available as pre-sanded, fleece'n'flex PLUS with textured surface can be processed using standard industry presses. Variations in coloring and texture are normal for this high-quality natural product.





SCHORN & GROH  
Furniere · Veneers



*fleece'n'flex PLUS with textured surface  
available in more than 140 species of wood*

## Textured veneer at a glance:

- Several texture variants available, each in more than 140 species of wood
- **Standard sheets:** 2,440 mm x 1,220 mm, approximately 1.2 mm thick
- Standard plank matched, other jointing techniques available on request
- **Minimum order:** 100 m<sup>2</sup> per order
- **Structure:** two-layer veneer surfaces with fleece layer in between; back (bonding surface) of pre-sanded, smooth beech veneer, face side of precious veneer selected by customer
- Delivery of sheets, covered in PE film on pallets
- **Storage:** Ideally between about 18 to 25°C and 40 to 60 % relative humidity. Protect from UV rays and fluctuations in humidity, with film if necessary. Subject the veneer to climate conditioning before processing.
- **Bonding:** With all conventional bonding agents for veneer or fleece-backed veneer. The textured surface is more suitable for bonding in standard industry presses. We recommend using a press pad / press fleece or the like and making a sample bonding.
- **Surface treatment:** Lacquer or oil can be applied. Please make sure that you use a composite material with a certain scallop height.

**Roller application:** select soft rollers for application

**Spray application:** Choose amount and viscosity so that the texture is retained.

**Sanding:** Surface is pre-sanded, but its color can be impaired by thermal stress. If you want to prevent this reaction, you can treat the surface with abrasive fleece. Do not use sanding belts or sandpaper!

fleece'n'flex

Schorn & Groh GmbH  
Industriestraße 34 · 74927 Eschelbronn  
Tel: +49 (0)62 26 / 7 85 73 50 · Fax: +49 (0)62 26 / 4 08 17  
info@sg-veneers.com · [www.sg-veneers.com](http://www.sg-veneers.com)